


A-105
CANTOR, FITZGERALD SECURITIES
E-1 10/14/82 TAA 2392

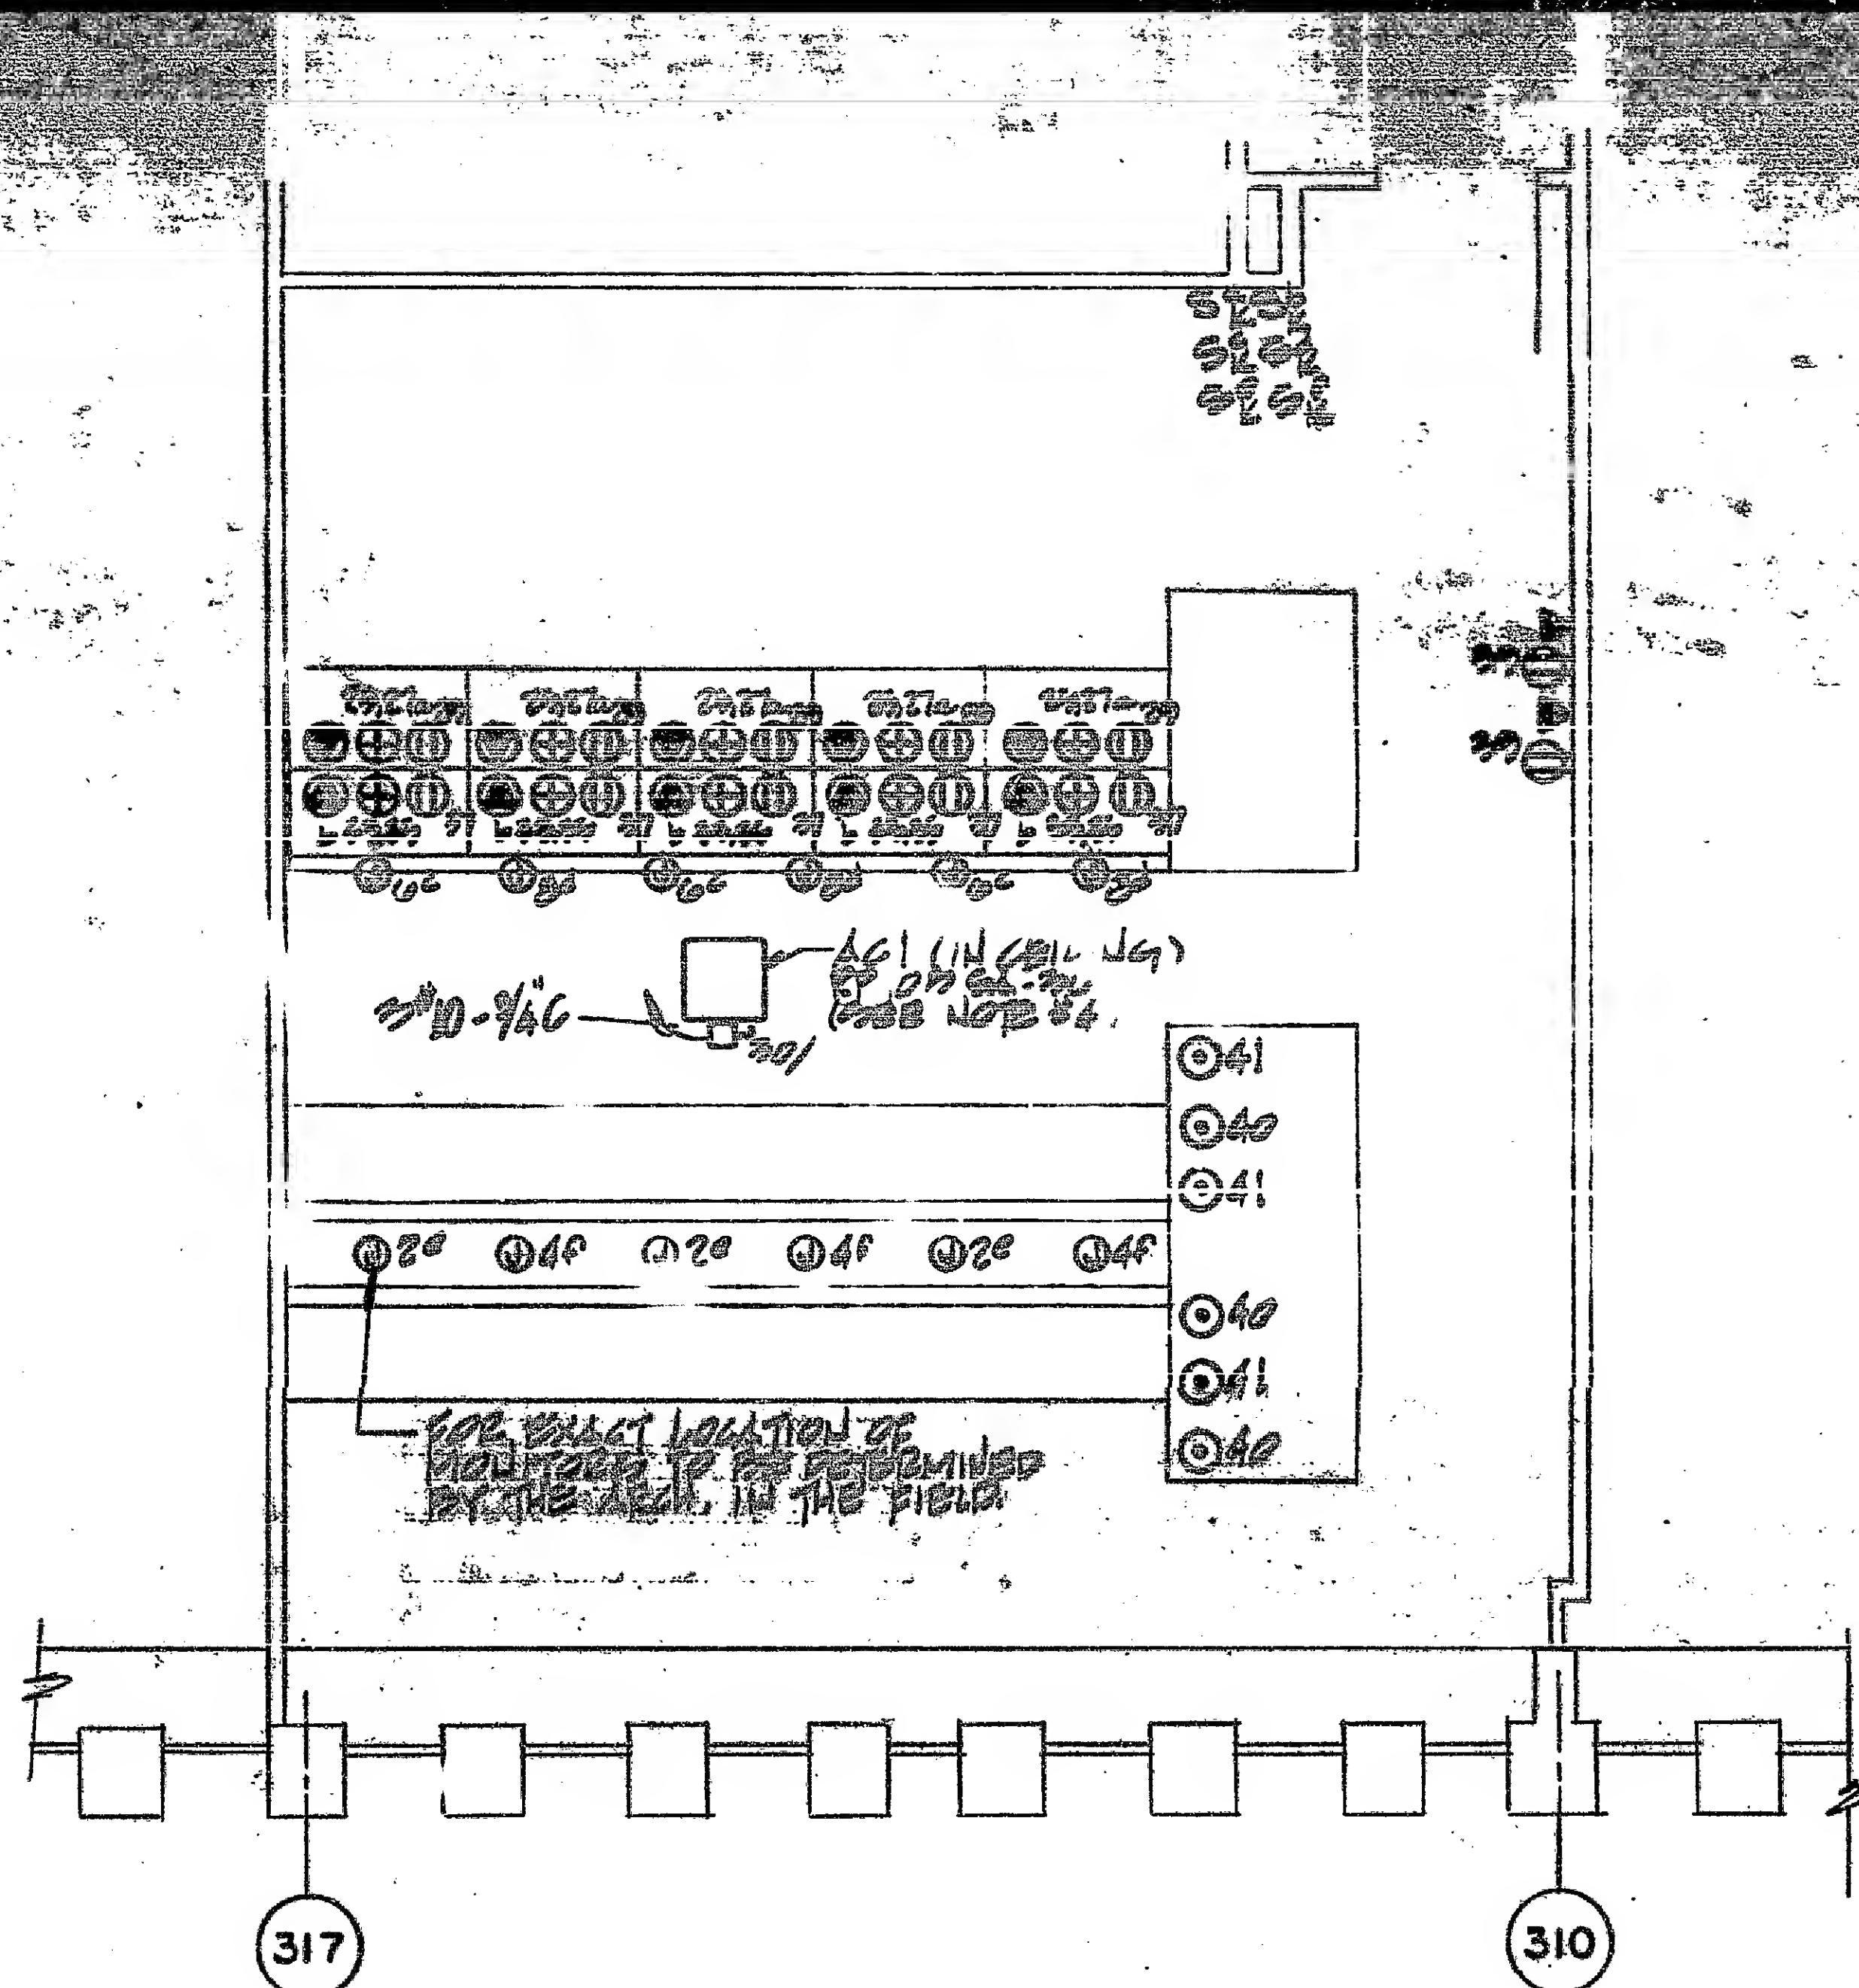


PART FLOOR PLAN
SCALE 1/4" = 1'-0"

| SYMBOL LIST | |
|-------------|---|
| | 20 AMP., 120 VOLT KEY OPERATED SWITCH (HUBBELL #1221-D). LETTER DENOTES DEVICES CONTROLLED. |
| | 15 AMP., 125 VOLT GROUNDING TYPE, DUPLEX RECEPTACLE (HUBBELL #5262) MOUNTED ON WALL OR COUNTER. |
| | 15 AMP., 125 VOLT GROUNDING TYPE, DUPLEX RECEPTACLE (HUBBELL #5262) IN A 1900 BOX SURFACE MOUNTED ON FLOOR BELOW RAISED FLOOR. |
| | HORSEPOWER RATED DISCONNECT SWITCH (FUSED, UNFUSED). SIZE AS NOTED ON DRAWINGS. |
| | WALL MOUNTED TELEPHONE OUTLET. 1" E.C. W/DRAW WIRE TO BE STUBBED UP ABOVE HUNG CEILING. |
| | TELEPHONE OUTLET TO BE INSTALLED IN A 1900 BOX WITH 1" KNOCKOUTS AND COVER WITH A BUSHED HOLE, MOUNTED BELOW RAISED FLOOR SIMILAR TO DUPLEX RECEPTACLE BOXES. |
| | JUNCTION BOX. |
| | ABOVE FINISHED FLOOR. |
| | DOUBLE 15 AMP., 125 VOLT GROUNDING TYPE DUPLEX RECEPTACLES (HUBBELL #5262) IN A 1900 BOX SURFACE MOUNTED ON FLOOR BELOW RAISED FLOOR. |

| EXISTING PANEL SCHEDULES | | | | | | | NO. 2084 | |
|--------------------------|----------------|------|------|---|------|-------|----------|--|
| PANEL DESIGNATION | CIRCUIT NUMBER | AMP. | TYPE | SERVICES | WIRE | COND. | FE | |
| RE-1055B | 25 | 20 | 1 | Monitor Receptacles | 3/12 | 3/4" | | |
| MAIN | 26 | 20 | 1 | Terminal | | | | |
| 42 POLES | 29 | 20 | 1 | Knee Outlets | | | | |
| | 33 | 20 | 1 | Monitor Receptacles | | | | |
| | 35 | 20 | 1 | Terminal | | | | |
| | 37 | 20 | 1 | Knee Outlets | | | | |
| | 38 | 20 | 1 | Wall Monitor Outlets | | | | |
| | 40 | 20 | 1 | Distribution Amp. Outlets | | | | |
| | 43 | 20 | 1 | Printer Receptacles | | | | |
| | | | | Remaining Existing Breakers to remain unchanged | | | | |

NOTES

1. ALL RECEPTACLES IN THIS AREA SHALL BE EXTENDED & CONNECTED TO EXIST. SPACE CIRCUITS IN PANEL "R1055B" UNLESS OTHERWISE NOTED.
2. ALL CEILING MONITORS SHALL BE WIRED TO APPROPRIATE KEY SWITCH AS INDICATED ON THE DRAWING FOR MANUAL SHUTDOWN.
3. CONTRACTOR SHALL PAINT RED ALL RECEPTACLES CIRCUITED TO CUT-OFF (LEFT SIDE OF OUTLET BOX). THESE RECEPTACLES SHALL BE WIRED THEN THE APPROPRIATE KEY SWITCH AS INDICATED ON THE DRAWING FOR MANUAL SHUTDOWN.
4. CONTRACTOR SHALL 1 POLE FEEDBACK PANEL "R1055B" A 2 POLE 20 AMP. & CONNECT WEN
5. CONTRACTOR SHALL THROUGH OUT & ALL URBTHANS FROM ALL WORK DONE THE NATIONAL BU

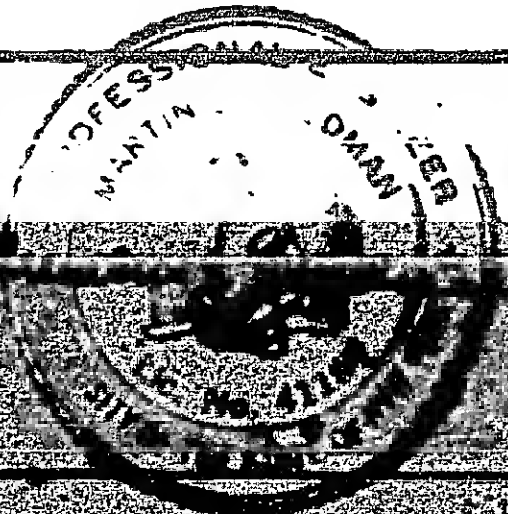

CANTOR FITZGERALD SECURITIES CORP.
WORLD TRADE CENTER

ALTERATION TO MUNI ROOM
REWORKED BY AN ENGINEER
SCHEDULES & NOTES